

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 186 580 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
13.03.2002 Bulletin 2002/11

(51) Int Cl.7: **C04B 41/89, B23B 27/14**

(21) Application number: **01307358.0**

(22) Date of filing: **30.08.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- Ota, Michiko, Itami Works
Itami-shi, Hyogo (JP)
- Ohara, Hisanori, Itami Works
Itami-shi, Hyogo (JP)
- Fukui, Haruyo, Itami Works
Itami-shi, Hyogo (JP)

(30) Priority: **31.08.2000 JP 2000262399**
17.08.2001 JP 2001247814

(71) Applicant: **Sumitomo Electric Industries, Ltd.**
Osaka (JP)

(72) Inventors:
• **Kukino, Satoru, Itami Works**
Itami-shi, Hyogo (JP)


(74) Representative:
Cross, Rupert Edward Blount et al
BOULT WADE TENNANT,
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)

(54) **A cutting tool of a surface-coated boron nitride sintered compact**


(57) The object of the present invention is to provide a cutting tool consisting of a surface-coated high pressure phase type boron nitride sintered compact, having a markedly improved adhesive strength of a hard coated layer to a cBN sintered compact substrate.

The feature consists in a surface-coated boron nitride sintered compact tool, in which at least a part of the tool edge related with cutting is based on a substrate of a high pressure phase type boron nitride, and a surface-coated layer is allowed to be present on the surface thereof, the said surface-coated layer comprising an intermediate layer being present in discontinuous manner to the interface of the said high pressure phase boron nitride sintered compact substrate and a hard coated layer formed further thereon or in the form of dispersed particles, the said intermediate layer consisting of at least one element selected from the Group 4a, 5a and 6a of Periodic Table.

DISCONTINUOUS

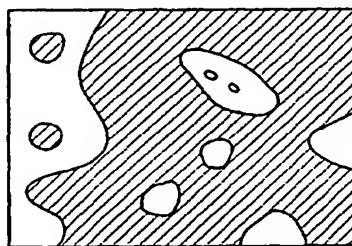

(A)

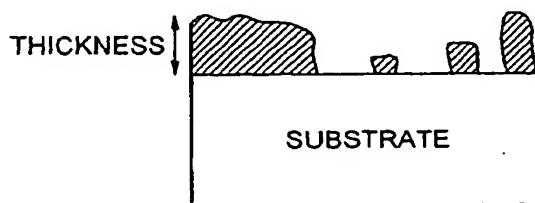

(B)

FIG. 1

Description

[0001] This invention relates to an improvement relating to a cutting tool material using, as a substrate, a sintered compact comprising a high pressure phase boron nitride such as cubic boron nitride (cBN), wurtzite boron nitride (wBN), etc., which will hereinafter be referred to as "cBN sintered compact", and in particular, it is concerned with a cutting tool of a surface-coated boron nitride having a hard coated film excellent in adhesive strength as well as smoothness.

[0002] cBN (cubic boron nitride) has a hardness and thermal conductivity next to diamond and excellent characteristics such that reactivity with ferrous metals is lower as compared with diamond. Thus, a cutting tool using a cBN sintered compact containing this cBN has displaced grinding or working tools and cutting tools of cemented carbides or cermets in working hard-to-cut ferrous materials from the standpoint of improving the working efficiency and reducing the installation cost.

[0003] The cBN sintered compact for a cutting tool is a sintered compact comprising cBN particles and a binder, which can generally be classified into the following two types:

(1) Sintered compact well-balanced in wear resistance as well as strength and mainly used for hardened steels, which comprises 30 to 80 volume % of cBN particles, the cBN particles being bonded through a binder predominantly consisting of Ti type ceramics such as TiN, TiC, TiCN, etc.

(2) Sintered compact excellent in thermal conductivity as well as strength and mainly used for cast irons, which comprises 80 to 90 volume % of cBN particles, the cBN particles being directly bonded and the balance of a binder predominantly consisting of an Al compound or Co compound.

[0004] cBN compacts for cutting tools have lately been watched with keen interest as a tool adaptable for the global environment problem, since consciousness for the global environment problem is more increasing, for example, as to reduction of industrial wastes such as grinding sludges and decrease of consumed electric power as a prevention from the global warming problem.

[0005] However, cBN particles have disadvantages that affinity for ferrous metals is larger than TiN, TiC, TiCN binders, in addition to having cleavage property, in spite of that the cBN particles have a higher hardness as represented by a Vickers hardness Hv of about 5,000 (the hardness Hv of the binder being at most about 2,500). Accordingly, further a service life lengthening is desired for the cBN compact tool because of finally expiring due to thermal abrasion and breakage of the tool edge due to progress of abrasion.

[0006] In particular, of late, expectation for the cBN compact tool has similarly been more increased from the standpoint of diversification of hardened steel parts and function increasing and it has been desired to develop a tool capable of working a surface of workpiece in a high grade and with a high speed and high efficiency.

[0007] For example, in order to further improve the wear resistance and fracture strength of a cBN sintered compact, a method has been proposed comprising coating the cBN sintered compact with a film of TiN, TiCN, TiAlN, etc.

[0008] However, a cBN sintered compact tool meets with a problem that an unexpected delamination of a coated film occurs often, resulting in dispersion of the service life because of being used under severe conditions.

[0009] For the purpose of improving the adhesive strength of a coated film, there has been proposed a tool, which is used for previously roughening a surface of substrate in a roughness of 0.5 to 12.5 μm and film making on the roughened surface, for example, as shown in JP-A-7-18415 or US Patent No. 5,709,907. In the case of carrying out cutting using these tools, the shape of the tool surface is transferred to a workpiece and accordingly, the dimensional precision and grade of the worked surface is worsened as compared with the prior art cBN sintered compacts. Since the cBN tool is often applied to uses requiring a working precision with μm order, in particular, practical cutting by these tools is difficult.

[0010] On the other hand, as a means for improving the adhesive strength of a coated film without surface-roughening a cBN substrate, there has been proposed a tool comprising a cBN sintered compact whose surface is coated with a hard coated film consisting of titanium nitride through a metallic Ti layer with an mean layer thickness of 0.05 to 0.3 μm , for example, as shown in JP-A-1-96083 or JP-A-1-96084. According to these methods, however, a cutting edge is exposed to a high pressure and high temperature environment during cutting a relatively hard, hard-to-cut ferrous material and accordingly, there arises a problem that metallic titanium thus softens and the hard coated film is easily broken and delaminated.

[0011] In a TiAlN-coated cBN tool of JP-A-8-119774, there is disclosed such a technique that a TiN layer is coated as an intermediate layer between a cBN substrate and TiAlN-coated film to bond the TiAlN-coated film thereto with a high adhesive strength without surface roughening the cBN substrate, but according to this technique, further improvement of the adhesive strength between the cBN substrate and TiN film cannot be expected in principle and in the case of coating a cBN sintered compact with a small content of TiN or TiC, that is, high cBN content sintered compact, moreover, lowering of the adhesive strength of the hard coated film is unavoidable.

[0012] Accordingly, the inventors have made studies on the mechanism of breakage or delamination of the hard coated film in the coated cBN sintered compact tool for the purpose of developing a tool capable of providing a high grade worked surface maintained for a long time without delaminating the hard coated film in the coated cBN sintered compact tool even if the tool is subjected to cutting under severer conditions.

[0013] Consequently, the inventors have found that:

(I) a cBN sintered compact is bonded with a hard thin film such as TiN, TiCN or TiAlN film by diffusion or reaction between the substrate and the hard coated film, during which a stronger adhesion occurs with the binder part rather than with the hardly sinterable cBN particles to maintain the adhesive strength of the hard coated film and substrate and

(II) When an excessive stress remains in the hard coated layer or when an impact is loaded on a hard coated film from outside, for example, during working a workpiece having an interrupted part, film delamination due to breakage in the interface between the hard coated film and cBN sintered compact or in the hard coated film takes place by such a stress.

[0014] It is an object of the present invention to provide an improved cutting tool based on a sintered compact comprising a high pressure phase type boron nitride such as cBN, wBN, etc., having a hard coated film excellent in adhesive strength as well as smoothness.

[0015] It is another object of the present invention to provide a surface-coated high pressure phase boron nitride sintered compact tool in which the adhesive strength of the hard coated film to the substrate is remarkably improved, in particular, noticing an improvement of an intermediate layer, whereby the problems of the prior art, as described above, can be solved.

[0016] These objects can be accomplished by a surface-coated boron nitride sintered compact tool, in which at least a part of the tool edge related with cutting is based on a substrate of a high pressure phase type boron nitride, and a surface-coated layer is allowed to be present on the surface thereof, the said surface-coated layer comprising an intermediate layer present in discontinuous manner to the interface of the said high pressure phase boron nitride sintered compact substrate and a hard coated layer formed further thereon, the said intermediate layer consisting of at least one element selected from the Group 4a, 5a and 6a of Periodic Table having a thickness of at most 1 μm , preferably at least 0.005 μm to at most 1 μm .

[0017] The accompanying drawings are to illustrate the principle and merits of the present invention in detail, which are provided by way of example.

[0018] Fig. 1 is a plan view (A) and sectional view (B) of a coated state of an intermediate layer in discontinuous manner according to the present invention on a cBN substrate surface.

[0019] Fig. 2 is a plan view (A) and cross-sectional view (B) of a coated state of an intermediate layer as a granular and discontinuous phase according to the present invention on a cBN substrate surface.

[0020] Fig. 3 is a typical view of a film making apparatus by an arc ion plating method used for the production of a sintered compact according to the present invention, (A) being a cross sectional view and (B) being a plan view.

[0021] Fig. 4 is a graph showing a Cr distribution in a surface-coated layer.

[0022] The inventors have thought that in a surface-coated boron nitride sintered compact, improvement of the adhesive strength of the cBN sintered compact without roughening the surface thereof can be effected by forming an intermediate layer with good reactivity with cBN particles as a predominant component of the cBN sintered compact and the cBN sintered compact substrate can thus be coated with a hard coated layer with a high adhesive strength. Consequently, it is found as a result of our studies that when an intermediate layer is formed of a metallic or intermetallic compound containing at least one element selected from the Group 4a, 5a and 6a of Periodic Table and has a specified thickness, the cBN sintered compact substrate can be coated with hard coated layer with a high adhesive strength and the hard coated layer is hardly delaminated even if subjected to cutting under severer conditions. The present invention is based on this finding.

[0023] The above described objects can favourably be achieved by each of the invention and embodiments summarized below:

(1) A surface-coated boron nitride sintered compact tool, in which at least a part of the tool edge related with cutting is based on a substrate of a high pressure phase type boron nitride, and a surface-coated layer is allowed to be present on the surface thereof, the said surface-coated layer comprising an intermediate layer present in discontinuous manner to the interface of the said high pressure phase boron nitride sintered compact substrate and a hard coated layer formed further thereon, the said intermediate layer consisting of at least one element selected from the Group 4a, 5a and 6a of Periodic Table having a thickness of at most 1 μm , preferably at least 0.005 μm to at most 1 μm .

(2) A surface-coated boron nitride sintered compact tool, in which at least a part of the tool edge related with cutting

is based on a substrate of a high pressure phase type boron nitride, and a surface-coated layer is allowed to be present on the surface thereof, the said surface-coated layer comprising an intermediate layer present in discontinuous manner to the interface of the said high pressure phase boron nitride sintered compact substrate and a hard coated layer formed further thereon, the said intermediate layer being present as dispersed particles consisting of at least one element selected from the Group 4a, 5a and 6a of Periodic Table, the proportion of particles of at least 0.1 to less than 0.5 μm being at least 1 % to at most 20 % by volume, preferably at least 1 % to at most 18 % by volume, based on the surface-coated layer, and the proportion of at least 0.5 μm by volume being at most 5 %, based on the surface-coated layer.

(3) The surface-coated boron nitride sintered compact tool as described in the foregoing (1) or (2), wherein the intermediate layer contains at least one of elements of Cr, Zr and V.

(4) The surface-coated boron nitride sintered compact tool as described in any one of the foregoing (1) to (3), wherein the hard coated layer contains at least one layer containing at least one element selected from the group consisting of Group 4a, 5a, 6a elements, Al, B, Si and Y and at least one element selected from the Group consisting of C, N and O and having a hardness of a Knoop Hardness H_k = at least 2,000 and a film thickness of at least 0.5 μm to at most 10 μm , preferably at least 1 μm to at most 5 μm .

(5) The surface-coated boron nitride sintered compact tool as described in any one of the foregoing (1) to (4), wherein the surface-coated layer is formed by an ion plating method, sputtering method or vacuum arc vapor deposition method.

(6) The surface-coated boron nitride sintered compact tool as described in any one of the foregoing (1) to (5), wherein the outermost surface layer of the surface-coated layer is a compound consisting of at least one element selected from the group consisting of Ti and Cr and at least one element selected from the group consisting of C, N and O.

(7) The surface-coated boron nitride sintered compact tool as described in any one of the foregoing (1) to (6), wherein the outermost surface layer of the surface-coated layer is a CrN layer.

(8) The surface-coated boron nitride sintered compact tool as described in any one of the foregoing (1) to (7), wherein at least a site related with cutting is provided with a surface-coated layer having a central line mean roughness R_a , defined by JIS B0601 (measured length 0.8 mm), of at most 0.2 μm .

(9) The surface-coated boron nitride sintered compact tool as described in any one of the foregoing (1) to (8), wherein at least a part of the tool edge related with cutting is based on a cubic boron nitride sintered compact comprising at least 30 volume % to at most 80 volume % of cBN and the balance of at least one binder selected from the group consisting of nitrides, borides, carbides of Group 4a, 5a and 6a elements of Periodic Table, and Al compounds and solid solutions thereof and unavoidable impurities.

(10) The surface-coated boron nitride sintered compact tool as described in any one of the foregoing (1) to (8), wherein at least a part of the tool edge related with cutting is based on a cubic boron nitride sintered compact comprising at least 80 volume % to at most 90 volume % of cBN and the balance of at least one binder selected from the group consisting of Co compounds and Al compounds, and solid solutions thereof and unavoidable impurities.

(11) The surface-coated boron nitride sintered compact tool as described in any one of the foregoing (1) to (10), wherein the cubic boron nitride has a mean grain diameter of at most 4 μm , preferably at least 0.5 μm to at most 3.5 μm .

[0024] As a component of the above described intermediate layer, there are preferably used metallic Cr, Ti, V, Zr and W. These metals are reactive with a high pressure phase type boron nitride such as cBN as a predominant component of the cBN sintered compact of the substrate and are reacted therewith to form nitrides and borides of the above described metals in the interface between the above described cBN substrate and intermediate layer, whereby to increase the adhesive strength thereof, and furthermore, the intermediate layer is reacted with a hard coated layer coated on the intermediate layer to readily form nitrides, carbides, carbonitrides and oxides of Cr, Ti, V, Zr and W, whereby to bond the cBN sintered compact as the substrate and the hard coated film.

[0025] When the intermediate layer is formed, elements for composing the intermediate layer are diffused into the inside of the sintered compact in the cubic boron nitride particles and binder part by kinetic energy incident upon the cBN sintered compact surface to form a gradient composition material continuously changed in composition. The cBN sintered compact surface containing elements for composing the thus formed intermediate layer further improves the adhesive strength with the intermediate layer.

[0026] In the interface between the intermediate layer and hard coated layer, there is also formed a gradient composition part of the elements forming the intermediate layer to improve the adhesive strength of the interface. Moreover, when the elements forming the intermediate layer in a very small amount are added to a layer of a compound such as TiAlN for forming the hard coated layer, the wear resistance and oxidation resistance of the hard coated layer can further be improved as to properties as a cutting tool.

[0027] When there remains excessive stress in the hard coated layer even if improving the adhesive strength at the interface of the cBN substrate, film delamination sometimes takes place due to breakage in the film by the residual stress. However, the film delamination due to breakage in the hard coated layer can be suppressed by discontinuously arranging an intermediate layer more excellent in ductility than the hard coated layer to moderate the concentration of stress. As shown in Fig. 2, in particular, it is preferable from the standpoint of stress moderation that the above described discontinuously formed intermediate layer is composed of particles having a particle diameter of at least 0.1 μm to at most 0.5 μm .

[0028] That is, the granular intermediate layer is surrounded by the foregoing hard coated layer, whereby a skeleton structure of a more compact and finer hard coated layer can be formed, and this is particularly effective for such uses that the cutting edge is loaded with large impacts, for example, in continuous cutting of high hardness, hard-to-cut ferrous materials with largely fluctuated cutting depths or with a number of initial cuttings, in interrupted cutting of hard-to-cut ferrous materials, etc.

[0029] The present invention is characterized in that the intermediate layer is formed as a discontinuous layer or a granular discontinuous layer, as described above, whereby the adhesive strength between the cBN sintered compact and hard coated layer is more increased and the concentration of stress is moderated, thus obtaining advantages of suppressing delamination of the hard coated layer and cBN sintered compact substrate.

[0030] The discontinuous intermediate layer has a thickness of preferably at least 0.005 μm to at most 1 μm to obtain a high adhesive strength (discontinuous intermediate layer, Cf. Fig. 1 (A) and (B)). The ground for limiting the thickness is as follows. When the thickness of the intermediate layer is less than 0.005 μm , a diffusion layer or reaction layer cannot be formed to obtain a sufficient adhesive strength, or when the intermediate layer exceeds 1 μm , a layer consisting of a low hardness, metallic component remaining not diffused nor reacted is too thick to prevent the hard coated layer from delamination during cutting at a high temperature and high pressure.

[0031] The discontinuous intermediate layer is composed of dispersed particles (granular discontinuous intermediate layer, Cf. Fig. 2 (A) and (B)). When the proportion of grains of at least 0.1 μm to less than 0.5 μm exceeds 20 % by volume or the proportion of at least 0.5 μm exceeds 5 % by volume, the physical properties of the surface coated layer are dominant, as described above, and the cutting property of the surface-coated boron nitride sintered compact cutting tool is largely lowered.

[0032] When the particles of at least 0.1 μm to less than 0.5 μm are less than 1 % by volume, we cannot find any effect of the above described stress moderating.

[0033] As a component of the above described intermediate layer, there are preferably used metallic Cr, Zr and V.

[0034] Cr is capable of providing an intermediate layer having a smoother surface roughness as compared with metallic Ti, V, Zr, Hf and W. This is because Cr has a higher melting point, i.e. 1890 $^{\circ}\text{C}$, while Ti has a melting point of 1675 $^{\circ}\text{C}$, and Cr is hard to be coarser particles during coating the intermediate layer and capable of giving a uniform, dense and smooth surface roughness intermediate layer, because of having a high vapor pressure similar to that of low melting point Al in spite of that Cr is a high melting point metal. Consequently, in the case of using metallic Cr for an intermediate layer, the surface roughness of the surface-coated boron nitride sintered compact cutting tool is more smooth and in addition, a worked piece can be worked in a higher grade than in the case of using the foregoing cutting tools having intermediate layers of metallic Ti, V, Zr, Hf and W.

[0035] Zr forms a boride through reaction with high pressure phase boron nitride during film making of the intermediate layer and Zr boride is very stable for ferrous metals, while Ti boride has relatively high affinity for ferrous metals. Thus, in the case of using metallic Zr for an intermediate layer, the metallic intermediate layer is less damaged during cutting and is subjected to less lowering of the adhesive strength during abrasion of the edge than in the case of using metallic Ti for an intermediate layer.

[0036] V and V compounds are capable of decreasing the cutting resistance because of forming an oxide having lubricating action.

[0037] Formation of the intermediate layer can be carried out in known manner, for example, by PVD methods such as vacuum vapor deposition method, sputtering method, vacuum arc vapor deposition method, ion plating method or by various CVD methods. Above all, the ion plating method, sputtering vapor deposition method and vacuum arc vapor deposition method are particularly preferable, since these methods provide high adhesive strengths with the substrates through high ionization efficiency of raw materials, ion implantation effect on the substrate, etc. In the case of forming an intermediate layer, control of the thickness in at least 0.005 μm to less than 1 μm is generally carried out by suitably controlling the variety of gases, gas pressure, vacuum degree, arc current, bias voltage and film making time depending on the variety of a target for the operation of an ordinary film making apparatus.

[0038] In order to form a discontinuous or granular intermediate layer, a bias voltage applied to a substrate to be treated is predominantly controlled in -300 V to -1000 V, since if the bias voltage is less than -300 V, a continuous film is formed and the object of the present invention cannot be achieved and if the bias voltage exceeds -1000 V, the sputtering effect is too large to form an intermediate layer.

[0039] As described above, when using only a cBN sintered compact, there occur sometimes cases where a wear

resistance is lacking or where cleaved particles or falling particles of cBN during cutting are caught in a tool edge to form striated scratches on the flank wear part of the tool, which are transferred to the worked surface, thus deteriorating the surface roughness of a worked surface.

[0040] Thus, it is preferable that the hard coated layer comprises a layer of at least one compound formed of at least one element selected from the group consisting of Group 4a, 5a and 6a elements of Periodic Table, Al, B, Si and Y, and at least one element selected from the group consisting of C, N and O. When a cBN sintered compact is coated with the above described hard coated layer with a good adhesive strength to prevent the cBN particles from contacting with a hard-to-cut ferrous material, there are given merits, for example, improvement of the wear resistance and breakage resistance of the tool and working of a surface of a workpiece with a higher grade. In particular, when Y is dissolved to form a solid solution, the hardness and oxidation resistance of the film can be improved.

[0041] In the present invention, the hard coated layer can suitably be formed of a plurality of layers, the outermost surface layer of which is preferably TiN or CrN layer. The reason therefor is that the cBN sintered compact exhibits a color of black, while TiN and CrN respectively have clear colors of gold and silver, which serve to make easy to distinguish a service life of expired tool and non-used tool, when using the present surface-coated sintered compact tool through a mass-production system, thus fulfilling management of the tools. It is particularly preferable that the outermost surface layer of the hard coated layer is a CrN layer, since adhesion during cutting can be suppressed to maintain a good finished surface for a long time by coating the outermost surface with the CrN layer having a very small friction coefficient.

[0042] The CrN film of the prior art has a lower hardness, i.e. $H_k = 1,700$ than that of TiN film, i.e. $H_k = 2,000$ in spite of having the above described excellent adhesion resistance. Accordingly, in the case of coating a cBN substrate with a monolayer or using a cemented carbide substrate, a large stress concentration takes place on the film surface, so that the CrN film or cemented carbide substrate is subject to plastic deformation and cannot follow in the deformation, thus resulting in cracking or delamination of the CrN film.

[0043] In the present invention, a cBN sintered compact or TiAlN ($H_k =$ at least 2,500) more excellent in hardness than CrN is used as a ground, by which, even if a large stress concentration takes place, the quantity of deformation is suppressed to prevent the CrN film from breakage and to remarkably improve the durability.

[0044] The film thickness of the hard coated layer is preferably adjusted to at least $0.5\ \mu\text{m}$ to at most $10\ \mu\text{m}$, in particular, at least $1\ \mu\text{m}$ to at most $5\ \mu\text{m}$, since if the film thickness is less than $0.5\ \mu\text{m}$, the hard coated layer is subject to abrasion in too short time to maintain the effect of the hard coated layer, while if exceeding $10\ \mu\text{m}$, the adhesive strength with the substrate is decreased by the residual stress in the hard coated layer.

[0045] Formation of the surface-coated layer is generally carried out in known manner, for example, by PVD methods such as vacuum vapor deposition method, sputtering vapor deposition method, vacuum arc vapor deposition method, ion plating method or by various CVD methods. Above all, the ion plating method, sputtering vapor deposition method and vacuum arc vapor deposition method are particularly preferable, since these methods provide high adhesive strengths with the substrates through high ionization efficiency of raw materials, ion implantation effect on the substrate, etc.

[0046] In the case of a thin film formation by the PVD method, e.g. ion plating method, ionized raw materials are implanted into the substrate by a bias voltage applied to between a vaporization source and a substrate to be coated and clean the interface or form a kind of mixing layer in the interface, thus resulting in a higher adhesive strength. In one embodiment of the present invention, the intermediate layer and hard coated layer are formed by in continuous manner by a same apparatus, whereby the above described effects are given during formation of both the layers.

[0047] The cBN sintered compact as the substrate has the preferred compositions (1) and (2) exemplified below:

(1) A cBN sintered compact comprising at least 30 volume % to at most 80 volume % of cBN and the balance of at least one binder selected from the group consisting of nitrides, borides and carbides of Group 4a, 5a and 6a elements of Periodic Table, and Al compounds and solid solutions thereof, and unavoidable impurities.

This cBN sintered compact exhibits an improved wear resistance as well as strength, because of consisting of predominantly cBN particles and the above described binder with a low affinity for iron, strongly bonded with each other.

In this cBN sintered compact, the cBN content is preferably at least 30 % to 80 % by volume, since if the cBN content is less than 30 volume %, the hardness of the cBN sintered compact is lowered, for example, the hardness is lacking for cutting a high hardness workpiece such as hardened steel, while if the cBN content is more than 80 volume %, adhesion of cBN particles with each other through the binder is difficult and the hardness of the cBN sintered compact is decreased.

(2) A cBN sintered compact comprising at least 80 volume % to at most 90 volume % of cBN particles bonded with each other and the balance of at least one binder selected from the group predominantly consisting of Al compounds and Co compounds.

[0048] In this cBN sintered compact, the content of cBN particles can be increased by carrying out liquid phase sintering of Al- or Co-containing metal or intermetallic compound having a catalytic function as raw materials and bonding cBN particles with each other. That is, because of the high cBN content, the cBN particles form each other a strong skeleton structure which is excellent in breakage resistance and makes possible cutting under severer conditions.

[0049] In this cBN sintered compact, the cBN content is preferably at least 80 % to 90 % by volume, since if the cBN content is less than 80 volume %, the formation of the skeleton structure by bonding of cBN grains with each other is difficult, while if the cBN content is more than 90 volume %, non-sintered parts occur in the cBN sintered compact due to lacking of the above described binder having a catalytic action and the hardness of the cBN sintered compact is thus decreased.

[0050] When the mean particle diameter of cBN particles in the cBN sintered compact as a substrate is at most 4 μm , the cutting property is markedly improved

[0051] This is due to that when the cBN particles are of at most 4 μm , the surface area of the cBN particles is increased to improve the adhesive strength of the cBN particles and hard coated layer. A preferred range of the mean particle diameter is 0.5 to 3.5 μm .

[0052] The present invention will now be illustrated in detail without limiting the same.

Examples

(Example 1)

(1) Preparation of Sample

[0053] A binder powder consisting of 40 weight % of TiN and 10 weight % of Al, and 50 weight % of cBN powder with a particle diameter of 2 μm were mixed, charged in a cemented carbide vessel and sintered at a pressure of 5 GPa and a temperature of 1400 °C for 60 minutes to obtain a cBN sintered compact for continuously cutting hardened steels. The resulting cBN sintered compact was worked in a cutting insert with a shape of SNGA 120408 according to ISO Standard.

[0054] This insert was coated with a hard coated layer by the following method:

[0055] Fig. 3 (A) and (B) are typical drawings of a film making apparatus used in the present invention, which is according to a known arc ion plating method. Referring to Fig. 3 (A), a film making apparatus 1 comprises a chamber 2, main table 3, support rod 4, arc type vaporization sources 5a and 5b, cathodes 6a and 6b, direct current sources 7a, 7b and 8 as a variable power source and gas inlet 9 for feeding a gas.

[0056] The chamber 2 is connected with a vacuum pump to change the pressure in the chamber 2. This chamber is provided with the main table 3, support rod 4, gas inlet 9 and cathodes 6a and 6b.

[0057] The support rod 4 provided in the chamber 2 supports the main table 3. A revolving shaft is provided in the support rod 4 and this revolving shaft revolves the main table 3. The main table 3 is provided with a jig 11 for holding substrates 10. The support rod 4, main table 3 and jig 11 are electrically connected with a negative pole of the direct current source 8. A positive pole of the direct current source 8 is earthed.

[0058] The side wall of the chamber 2 is provided with the arc type vaporization sources 5b and cathode 6b in such a manner as facing the arc type vaporization sources 5a and cathode 6a connected with the arc type vaporization sources 5a.

[0059] The arc type vaporization source 5a and cathode 6a are electrically connected with a negative pole of the direct current source 7a. The positive pole of the direct current source 7a is earthed and electrically connected with the chamber 2. The positive pole of the direct current source 7b is earthed and electrically connected with the chamber 2. (As shown in Fig. 3 (B), a pair of vaporization sources 5c and 5d are arranged in the vertical direction to the paper surface.)

[0060] The arc type vaporization sources 5a and 5b partly melts the cathodes 6a and 6b by arc discharge between the cathodes 6a and 6b and chamber 2, and the cathode material is vaporized in the directions shown by arrows 12a and 12b. A voltage is applied to between the cathodes 6a and 6b and chamber 2. The cathode 6a is composed of (Ti 0.5, Al 0.5). The cathode 6b is composed of a metal or intermetallic compound consisting of at least one element selected from Group 4a, 5a and 6a elements of Periodic Table, such as Ti, Cr, Zr and V. The compound of (Ti 0.5, Al 0.5) means a compound having a ratio of number of atoms, i.e. Ti and Al of 0.5 : 0.5.

[0061] Into the gas inlet 9 for supplying gases are introduced various gases from the direction shown by an arrow 13. Examples of the gas includes argon, nitrogen, hydrogen, oxygen gases, or hydrocarbon gases such as methane, acetylene, benzene, etc.

[0062] Using the apparatus shown by Fig. 3 (A), the chamber 2 was evacuated with revolving the main table 3 by the vacuum pump, and the substrate 10 was heated at a temperature of 450 °C by a heater (not shown), the evacuation

being carried out until the pressure of the chamber 2 was 1.5×10^{-5} Pa. Then, argon gas introduced from the gas inlet 9 to maintain the pressure inside the chamber at 3 to 5.0 Pa, and while the voltage of the direct current source 8 was gradually raised, the surface of the substrate 10 was cleaned for 20 minutes at a voltage of -1000 V, after which the argon gas was exhausted.

5 [0063] Thereafter, argon gas was introduced from the gas inlet 9 in such a manner that the pressure inside the chamber 2 be 0.5 to 10.0 Pa. An arc current of 50 to 200 A was supplied from the direct current source 7b to generate metallic ions from the cathode 6b. The bias voltage of the direct current source 8 was adjusted to -300 V to -600 V and formation of various intermediate layers was carried out on the surface of the substrate 10, during which this state was maintained until reaching a predetermined thickness (10 nm). Depending on the variety of the target, a discontinuous intermediate layer (Fig. 1) was formed by controlling the above described gas pressure, arc current, bias voltage and film forming time, after which the direct current sources 7b and 8 were cut off and the argon gas was exhausted.

10 [0064] After the foregoing intermediate layer was formed, nitrogen gas was fed from the gas inlet 9 so that the pressure inside the chamber 2 be 5 Pa, an arc current of 100 A was supplied from the direct current source 7a to vaporize the compound of (Ti 0.5, Al 0.5), of which the cathode 6a was formed, and a voltage of -150 V was applied to the direct current source 8, thus forming a hard coated layer of (Ti, Al)N with a thickness of about 3µm on the surface of the substrate 10.

15 [0065] Subsequently, the direct current source 7a was cut off and an arc current of 100 A was supplied to the direct current source 7b to generate Cr ion from the cathode 6b and to form a CrN film of about 0.5µm thick on the outermost surface of the substrate 10.

20 [0066] Further, inserts of the present invention (Sample Nos. 1 to 4) were prepared in an analogous manner to described above, except changing the cathodes 6a and 6b and changing the film making time.

[0067] For comparison, there were prepared Sample No. 13, in which a hard coated layer was formed without forming an intermediate layer, Sample No. 14, in which the material of an intermediate layer was not in the scope of the present invention, Sample Nos. 5 and 10, in each of which the film thickness of the intermediate layer was not within the scope of the present invention, Sample No. 20, in which the film thickness of a hard coated layer was not within the scope of the present invention, Sample No. 21, in which the surface-coated layer of the present invention was coated on a cemented carbide substrate (P 30) and Sample No. 22, in which a cBN sintered compact was not coated with the surface-coated layer.

25 [0068] The hardness (Hk) of these hard coated layers as to the above described samples was measured by lapping a sample by a lapping paper of # 10000, and indenting a Knoop indenter against the sample under conditions of a load of 25 g and time of 10 seconds, followed by measuring the indented size.

(2) Cutting Test

35 [0069] Using these cutting inserts, peripheral cutting of one of hardened steels, i.e. round bar of SUJ 2 (HRC 63) was carried out. The cutting was carried out under conditions of cutting speed 150 m/min, cutting depth 0.2 mm, feed 0.1 mm/rev. and dry process for 25 minutes and the flank wear width and delaminated state of the hard coated film were estimated.

40 [0070] Details of the samples and estimation results in the case of effecting the cutting tests are shown in Table 1.

Table 1

Sample No.	Intermediate Layer	Hard Coated Layer		Cutting Estimation				General Estimation
		First Layer (mean film thickness)	Surface Layer (mean film thickness)	Flank Wear Width After 5 Min. Cutting [mm]	Estimation	Cutting Time Till Film Delamination [min]	Estimation	
1	Ti (0.005 μm)	TiAlN (3.1 μm)	CrN (0.2 μm)	0.055	O	-	O	O
2	Ti (0.05 μm)	TiAlN (3.0 μm)	CrN (0.2 μm)	0.050	O	-	O	O
3	Ti (0.5 μm)	TiAlN (3.1 μm)	CrN (0.3 μm)	0.055	O	-	O	O
4	Ti (1.0 μm)	TiAlN (3.1 μm)	CrN (0.2 μm)	0.065	O	-	O	O
5	Ti (1.5 μm)	TiAlN (3.1 μm)	CrN (0.2 μm)	0.100	Δ	5.5	X	X
6	Cr (0.005 μm)	TiAlN (3.0 μm)	CrN (0.2 μm)	0.055	O	-	O	O
7	Cr (0.05 μm)	TiAlN (3.0 μm)	CrN (0.3 μm)	0.050	O	-	O	O
8	Cr (0.5 μm)	TiAlN (3.1 μm)	CrN (0.2 μm)	0.050	O	-	O	O
9	Cr (1.0 μm)	TiAlN (3.0 μm)	CrN (0.2 μm)	0.070	O	-	O	O
10	Cr (1.5 μm)	TiAlN (3.1 μm)	CrN (0.2 μm)	0.100	Δ	8	X	X
11	V (0.5 μm)	TiAlN (3.1 μm)	CrN (0.2 μm)	0.050	O	-	O	O
12	Zr (0.5 μm)	TiAlN (3.0 μm)	CrN (0.2 μm)	0.045	O	-	O	O

Table 1 (continued)

Sample No.	Intermediate Layer		Hard Coated Layer		Cutting Estimation			General Estimation
	Material (mean film thickness)	First Layer (mean film thickness)	Surface Layer (mean film thickness)	Flank Wear Width After 5 Min. Cutting [mm]	Estimation	Cutting Time Till Film Delamination [min]	Estimation	
13	no	TiAlN (3.0 μm)	CrN (0.2 μm)	0.055	O	16.5	Δ	Δ
14	Cu (0.5 μm)	TiAlN (3.0 μm)	CrN (0.2 μm)	not measured due to film delamination	-	0.5	x	x
15	Nb (0.5 μm)	TiAlN (3.0 μm)	CrN (0.2 μm)	0.105	Δ	11	Δ	Δ
16	Cr (0.5 μm)	CrN (3.0 μm)	CrN (0.2 μm)	0.155	x	-	O	x
17	Cr (0.5 μm)	TiAlN (0.2 μm)	CrN (0.2 μm)	0.125	Δ	-	O	Δ
18	Cr (0.5 μm)	TiAlN (0.3 μm)	CrN (0.2 μm)	0.065	O	-	O	O
19	Cr (0.5 μm)	TiAlN (9.0 μm)	CrN (0.5 μm)	0.055	O	24	O	O
20	Cr (0.5 μm)	TiAlN (10.0 μm)	CrN (0.5 μm)	0.060	O	21	Δ	Δ
21	Cr (0.5 μm)	TiAlN (3.1 μm)	CrN (0.5 μm)	film delamination and breakage due to plastic deformation of cemented carbide substrate		0.1	x	x
22	no	no	no	0.130	Δ	-	-	Δ

[Note] TiAlN : Hk = 2,700, CrN : Hk = 1,700, cBN Sintered Compact : Hk = 3,000; Estimation Results : O, Δ , x (good, medium, bad)

[0071] From these results, it will be understood that in the case of Sample Nos. 1 to 4, 6 to 9, 11, 12 and 16 to 20 of the present invention, whose intermediate layers are composed of at least one element selected from Group 4a, 5a and 6a elements of Periodic Table, film delamination is harder to occur in the Cutting Test, as compared with Sample No. 13 free from an intermediate layer and Sample No. 14 whose intermediate layer is composed of other elements than Group 4a, 5a and 6a elements of Periodic Table. Furthermore, abrasion is found to be largely decreased as compared with Sample No. 22, i.e. a cBN sintered compact for cutting hardened steels according to the prior art.

[0072] Sample Nos. 5 and 10 each having a larger thickness of the intermediate layer and Sample No. 20 having a relatively large thickness of the hard coated layer, as compared with the present invention, encounter film delamination at the initial period of cutting, thus resulting in a shorter service life.

[0073] Sample No. 21 comprising a cemented carbide substrate coated with the surface-coated layer of the present invention cannot be used in the working conditions of the present Examples, because of meeting with plastic deformation from the initial period of cutting and causing breakage of both the substrate and surface-coated layer.

(Example 2)

(1) Preparation of Sample

[0074] Using balls and a pot made of a cemented carbide, a binder powder consisting of 15 weight % of Co and 5 weight % of Al, and 80 weight % of cBN powder with a particle diameter of 3 μm were mixed, charged in a cemented carbide vessel and sintered at a pressure of 5 GPa and a temperature of 1400 $^{\circ}\text{C}$ for 60 minutes to obtain a cBN sintered compact for intermittent cutting of hardened steels. The resulting cBN sintered compact was worked in a cutting insert with a shape of SNGA 120408 according to ISO Standard.

[0075] This insert was coated with various surface-coated layers in an analogous manner to Example 1 by the use of the cathode 6a formed of (Ti 0.5, Al 0.5) containing 3 weight % of Y, and then subjected to measurement of the hardness (Sample Nos. 23 to 31).

[0076] Formation of a discontinuous and granular intermediate layer (Fig. 2) was carried out by controlling, in the step of forming the intermediate layer during the step of film making, the bias voltage of the direct current source 8 in -600 to -1000 V, the pressure inside the chamber in 0.5 to 10.0 Pa and depending on the variety of targets, controlling the gas pressure, arc voltage, bias voltage and film making time.

[0077] For the examination of a proportion of the granular discontinuous intermediate layer of with a size of at least 0.1 μm to smaller than 0.5 μm , and a proportion of the granular intermediate layer with a size of at least 0.5 μm , present in the surface coated layer, the foregoing coated samples (Sample Nos. 32 to 45) were subjected to analysis, as to a surface obtained by cutting in the vertical direction to the rake face by FIB (Focussed Ion Beam Working Device), by means of FE-SEM (Field Emission type Scanning Electroch Microscope).

(2) Cutting Test

[0078] Using these cutting inserts, peripheral cutting of one of hardened steels, i.e. workpiece (HRC 58) of round bar of SCM 415 having two U-type grooves. The cutting was carried out under conditions of cutting speed 200 m/min, cutting depth 0.2 mm, feed 0.1 mm/rev. and dry process for 15 minutes and the flank wear width and delaminated state of the hard coated film were estimated.

[0079] Details of the samples and esitmatation results in the case of effecting the cutting tests are shown in Table 2.

Table 2

Sam- ple No.	Intermediate Layer		Hard Coated Layer		Cutting Estimation				Gen- eral Es- ti- ma- tion
	Material (layer thickness)	Shape (proportion of particles of at least 0.1 μ m and less than 0.5 μ m / proportion of dispersed par- ticles of at least 0.5 μ m)	First Layer (mean film thickness)	Surface Layer (mean film thickness)	Crater Depth After 3 Min. Cutting [mm]	Es- ti- ma- tion	Cutting Time Till Film Delamina- tion [min]	Es- ti- ma- tion	
23	Ti (0.04 μ m)	continuous	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.032	O	13	Δ	Δ
24	Ti (0.5 μ m)	discontinuous	TiAlYN (3.1 μ m)	TiN (0.2 μ m)	0.027	O	-	O	O
25	Cr (0.5 μ m)	discontinuous	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.025	O	-	O	O
26	Cr (0.9 μ m)	discontinuous	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.029	O	-	O	O
27	Cr (1.1 μ m)	discontinuous	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.037	O	7	Δ	O
28	V (0.5 μ m)	discontinuous	TiAlYN (3.1 μ m)	TiN (0.3 μ m)	0.034	O	-	O	O
29	Zr (0.5 μ m)	discontinuous	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.028	O	-	O	O
30	Nb (0.5 μ m)	discontinuous	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.049	Δ	7	Δ	Δ
31	Cu (0.5 μ m)	discontinuous	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	not measured due to film delamination	-	0.1	x	x
32	Ti (0.5 μ m)	granular discontinuity (8% / 3%)	TiAlYN (3.1 μ m)	TiN (0.2 μ m)	0.031	O	-	O	O
33	Cr (0.5 μ m)	granular discontinuity (8% / 3%)	TiAlYN (3.1 μ m)	TiN (0.2 μ m)	0.025	O	-	O	O
34	V (0.5 μ m)	granular discontinuity (8% / 3%)	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.035	O	-	O	O

[Note] TiAlYN : Hk = 2,900, CrN : Hk = 1,700, cBN Sintered Compact : Hk = 3,500;
 Estimation Results : O, Δ , x (good, medium, bad)

Table 2 (continued)

Sample No.	Intermediate Layer		Hard Coated Layer		Cutting Estimation				General Estimation
	Material (layer thickness)	Shape (proportion of particles of at least 0.1 μ m and less than 0.5 μ m / proportion of dispersed particles of at least 0.5 μ m)	First Layer (mean film thickness)	Surface Layer (mean film thickness)	Crater Depth After 3 Min. Cutting [mm]	Estimation	Cutting Time Till Film Delamination [min]	Estimation	
35	Zr	granular discontinuity (8% / 3%)	TiAlYN (2.9 μ m)	TiN (0.3 μ m)	0.027	O	—	O	O
36	Cu	granular discontinuity (8% / 3%)	TiAlYN	TiN	not measured due to film delamination	—	0.2	x	x
37	Cr	granular discontinuity (0.5% / 3%)	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.032	O	18	Δ	Δ
38	Cr	granular discontinuity (1.0% / 3%)	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.028	O	—	O	O
39	Cr	granular discontinuity (18% / 3%)	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.022	O	—	O	O
40	Cr	granular discontinuity (22% / 3%)	TiAlYN (2.9 μ m)	TiN (0.2 μ m)	0.045	Δ	15	Δ	Δ
41	Cr	granular discontinuity (8% / 5%)	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.050	x	14	Δ	x
42	no	no	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	0.032	O	2	x	x
43	Cr	granular discontinuity (8% / 3%)	TiAlYN (9.0 μ m)	CrN (0.5 μ m)	0.029	O	—	O	O
44	Cr	granular discontinuity (8% / 3%)	TiAlYN (10.0 μ m)	CrN (0.5 μ m)	not measured due to film delamination	—	7	Δ	Δ
45	Cr	granular discontinuity (8% / 3%)	TiAlYN (3.0 μ m)	TiN (0.2 μ m)	film delamination and breakage due to plastic deformation of cemented carbide substrate	—	7	Δ	Δ
46	no	no	no	no	0.050	x	—	—	x

[Note] TiAlYN : Hk = 2,900, CrN : Hk = 1,700, cBN Sintered Compact : Hk = 3,500;
 Estimation Results : O, Δ , x (good, medium, bad)

[0080] From these results, it will be understood that in the case of Sample Nos. 24 to 26, 28, 29, 37 to 39 and 43,

whose intermediate layers are composed of at least one element selected from Group 4a, 5a and 6a elements of Periodic Table, film delamination is harder to occur in the Cutting Test and a longer service life during cutting can be obtained, as compared with Sample No. 42 free from an intermediate layer and Sample Nos. 31 and 36, whose intermediate layer is composed of other elements than Group 4a, 5a and 6a elements of Periodic Table. Furthermore, a longer service life can be given, as compared with Sample No. 46, i.e. a cBN sintered compact of the prior art.

[0081] Sample No. 27 having a larger thickness of the intermediate layer as compared with the present invention, Sample No. 40 having a larger proportion of particles with a size of at least 0.1 μm to less than 0.5 μm and Sample No. 41 having a larger proportion of dispersed particles with a size of at least 0.5 μm in the intermediate layer of the surface coated layer, reversely encounter sometimes film delamination, thus resulting in a shorter service life.

[0082] Sample No. 45 comprising a cemented carbide substrate coated with the surface-coated layer of the present invention cannot be used in the working conditions of the present Examples, because of meeting with plastic deformation from the initial period of cutting and causing breakage of both the substrate and surface-coated layer.

(Example 3)

(1) Preparation of Sample

[0083] Using balls and a pot made of cemented carbide, a binder powder consisting of 50 weight % of TiN and 5 weight % of Al, and 45 weight % of cBN powder with a particle diameter of 1 μm were mixed, charged in a cemented carbide vessel and sintered at a pressure of 5 GPa and a temperature of 1400 °C for 40 minutes to obtain a cBN sintered compact for high precision cutting of hardened steels. The resulting cBN sintered compact was worked in a cutting insert with a shape of SNGA 120408 according to ISO Standard.

[0084] This insert was coated with various surface-coated layers in an analogous manner to Example 2 by the use of the cathode 6a formed of (Ti 0.7, Al 0.3) and then subjected to measurement of the hardness.

[0085] The central line mean roughness Ra [defined by JIS B0601 (measurement length 0.8 mm)] of the surface-coated layer of a part related with cutting during the same time was estimated. The surface roughness of the surface coated layer was measured on various roughness samples prepared while varying the vacuum degree during film making within a range of 1×10^{-6} to 1×10^{-3} Torr.

[0086] When the presence state of the granular discontinuous intermediate layer present in the surface coated layer was examined in an analogous manner to Example 2, the proportion of particles with a size of at least 0.1 μm to less than 0.5 μm of the granular discontinuous intermediate layer was 8 % and the proportion of particles with a size of at least 0.5 μm of the granular intermediate layer was 3 %.

(2) Cutting Test

[0087] Using these cutting inserts, peripheral cutting of one of hardened steels, i.e. workpiece (HRC 60) of round bar of SCM 415 was then carried out. The cutting was carried out under conditions of cutting speed 200 m/min, cutting depth 0.1 mm, feed 0.08 mm/rev. and dry process for 40 minutes and the ten-point mean surface roughness Rz (defined by JIS B0601) of the workpiece and the delaminated state of the hard coated film were estimated.

[0088] Details of the samples and estimation results in the case of effecting the cutting tests are shown in Table 3.

Table 3

Sample No.	Intermediate Layer	Hard Coated Layer			Cutting Estimation				General Estimation
	Material	First Layer (mean film thickness)	Surface Layer (mean film thickness)	Sample Ra [μm] (vacuum degree [10^{-3}Torr])	Workpiece Rz [μm]	Estimation	Cutting Time Till Film Delamination [min]	Estimation	
47	Cr	TiAlN ($3.0\mu\text{m}$)	CrN ($0.2\mu\text{m}$)	0.14 (0.5)	2.12	O	not delaminated	O	O
48	Cr	TiAlN ($3.0\mu\text{m}$)	CrN ($0.2\mu\text{m}$)	0.18 (1)	2.37	O	not delaminated	O	O
49	Cr	TiAlN ($3.0\mu\text{m}$)	CrN ($0.2\mu\text{m}$)	0.20 (5)	2.66	O	not delaminated	O	O
50	Ti	TiAlN ($3.0\mu\text{m}$)	CrN ($0.2\mu\text{m}$)	0.22 (0.5)	2.88	O	not delaminated	O	O
51	Ti	TiAlN ($3.0\mu\text{m}$)	CrN ($0.2\mu\text{m}$)	0.31 (1)	3.22	Δ	not delaminated	O	Δ
52	Ti	TiAlN ($3.0\mu\text{m}$)	CrN ($0.2\mu\text{m}$)	0.38 (5)	3.68	x	not delaminated	O	O
53	Cu	TiAlN ($3.0\mu\text{m}$)	CrN ($0.5\mu\text{m}$)	0.60 (0.5)	4.81	x	1.5	x	x
54	no	no	no	\approx 0.20	4.00	x	—	—	x

[Note] TiAlN : Hk = 2,500, CrN : Hk = 1,700, cBN Sintered Compact : Hk = 2,800;

\approx Surface Roughness of cBN Sintered Compact

Estimation Results : O, Δ , x (good, medium, bad)

[0089] From these results, it will be understood that in the case of Sample Nos. 47 to 52, whose intermediate layers are composed of at least one element selected from Group 4a, 5a and 6a elements of Periodic Table, high precision working of a sample with a smaller surface roughness, that is, working in a smoother surface and providing a smaller surface roughness Rz in the cutting test is rendered possible, and film delamination is harder to occur to lengthen the service life, as compared with Sample No. 53, whose Intermediate layer is composed of other elements than Group 4a, 5a and 6a elements of Periodic Table. Furthermore, it is apparent that a higher precision worked surface is obtained even in comparison with the prior art cBN sintered compact for high precision working of hardened steels.

[0090] Thus, it will be understood that when the intermediate layer is Cr layer, in particular, in Sample Nos. 47 to 52 whose intermediate layers are composed of at least one element selected from Group 4a, 5a and 6a of Periodic Table, the surface roughness Ra of the sample is smaller and the surface roughness Rz of the workpiece is smaller, thus resulting in a longer service life, than the articles of the present invention in which the intermediate layer having the same surface roughness consists of Ti.

(Example 4)

(1) Preparation of Sample

[0091] Using balls and a pot made of a cemented carbide, a binder powder consisting of 40 weight % of TiN and 15

EP 1 186 580 A2

weight % of Al, and 45 weight % of cBN powder with a grain diameter of 3 μm were mixed, charged in a cemented carbide vessel and sintered at a pressure of 5 GPa and a temperature of 1400 °C for 50 minutes to obtain a cBN sintered compact for wide use cutting of hardened steels. The resulting cBN sintered compact was worked in a cutting insert with a shape of SNGA 120412 according to ISO Standard.

5 [0092] This insert was coated with various surface-coated layers in an analogous manner to Example 1 by the use of the cathode 6a formed of (Ti 0.6, Al 0.4) and then subjected to measurement of the hardness.

10 [0093] When the presence state of the granular discontinuous intermediate layer present in the surface coated layer was examined in an analogous manner to Example 2, the proportion of particles with a size of at least 0.1 μm to less than 0.5 μm of the granular discontinuous intermediate layer was 8 % and the proportion of grains with a size of at least 0.5 μm of the granular intermediate layer was 3 %.

(2) Cutting Test

15 [0094] Using these cutting inserts, peripheral cutting of one of hardened steels, i.e. workpiece (HRC 15) of round bar of S45C was carried out. The cutting was carried out under conditions of cutting speed 600 m/min, cutting depth 0.5 mm, feed 0.3 mm/rev. and dry process for 30 minutes and the quantity of the flank wear width and the delaminated state of the hard coated film were estimated.

[0095] Details of the samples and estimation results in the case of effecting the cutting tests are shown in Table 4.

Table 4

Sample No.	Intermediate Layer	Hard Coated Layer		Cutting Estimation				General Estimation
		First Layer (mean film thickness)	Surface Layer (mean film thickness)	Flank Wear Width After 5 Min. Cutting [mm]	Estimation	Cutting Time Till Film Delamination [min]	Estimation	
55	Ti	TiAlN (2.9 μ m)	CrN (0.2 μ m)	0.105 (less adhesion)	Δ	-	O	Δ
56	Cr	TiAlN (2.9 μ m)	CrN (0.2 μ m)	0.080 (less adhesion)	O	-	O	O
57	V	TiAlN (2.9 μ m)	CrN (0.2 μ m)	0.070 (no adhesion)	O	-	O	Δ
58	V	TiAlN (3.0 μ m)	HfN (0.2 μ m)	0.070 (no adhesion)	O	-	O	Δ
59	V	TiAlN (3.1 μ m)	VN (0.2 μ m)	0.075 (no adhesion)	O	-	O	Δ
60	Zr	TiAlN (2.9 μ m)	CrN (0.2 μ m)	0.100 (less adhesion)	Δ	-	O	O
61	no	TiAlN (3.0 μ m)	CrN (0.2 μ m)	0.235 (more adhesion)	Δ	24	Δ	Δ
62	Cu	TiAlN (3.0 μ m)	CrN (0.2 μ m)	not measured due to film delamination	-	0.1	X	X
63	V	TiAlN (2.9 μ m)	CrN (0.2 μ m)	film delamination and breakage due to plastic deformation of cemented carbide substrate	-	0.5	X	X
64	no	no	no	0.255 (more adhesion)	X	-	-	X

Table 4 (continued)

Sample No.	Intermediate Layer	Hard Coated Layer		Cutting Estimation			General Estimation	
	Material	First Layer (mean film thickness)	Surface Layer (mean film thickness)	Flank Wear Width After 5 Min. Cutting [mm]	Estimation	Cutting Time Till Film Delamination [min]		Estimation
[Note] TiAlN : Hk = 2,800, CrN : Hk = 1,700, VN : Hk = 1,600, HfN : Hk = 2,200, cBN Sintered Compact : Hk = 3,000; Estimation Results : O, Δ, × (good, medium, bad)								

[0096] From these results, it will be understood that in the case of Sample Nos. 55 to 60, whose intermediate layers are composed of at least one element selected from Group 4a, 5a and 6a elements of Periodic Table, film delamination is harder to occur in the cutting test to lengthen the service life during cutting, as compared with Sample No. 61, which is free from an intermediate layer, and Sample No. 62, whose intermediate layer is composed of other elements than Group 4a, 5a and 6a elements of Periodic Table. Furthermore, abrasion is suppressed to lengthen the service life as compared with Sample No. 64 as the cBN sintered compact of the prior art.

[0097] In Sample Nos. 57 to 60 of the present invention, using V as an intermediate layer, there is no adhesion during cutting with good abrasive state.

[0098] Sample No. 63 comprising a cemented carbide substrate coated with the surface-coated layer of the present invention cannot be used in the working conditions of the present Examples, because of meeting with plastic deformation from the relatively initial period of cutting and causing breakage of both the substrate and surface-coated layer.

(Example 5)

(1) Preparation of Sample

[0099] A sample was prepared in an analogous manner to Example 1, except that in a production of a high pressure phase boron nitride (cBN or wBN) sintered compact, the mixing ratio of a binder and high pressure phase boron nitride powders or the grain sizes of the powders were changed in suitable manner. The coated layers were all composed of a discontinuous Cr intermediate layer (0.4 μm thick) with a hard coated layer as a first layer, i.e. TiAlN (3.0 μm) and an outermost surface layer, CrN (0.3 μm).

(2) Cutting Test

[0100] Using these cutting inserts, peripheral cutting of workpiece (HRC 59) of round bar of SKD 11 as die steel, having six V-type grooves, was carried out. The cutting was carried out under conditions of cutting speed 120 m/min, cutting depth 0.2 mm, feed 0.1 mm/rev. and dry process and the time was measured until the surface coated layer was delaminated or the cutting insert including the cBN substrate was broken.

[0101] Details of the samples and estimation results in the case of effecting the cutting tests are shown in Table 5.

Table 5

Sample No.	Substrate cBN Sintered Compact			Cutting Estimation			Estimation
	High Pressure Phase Boron Nitride Content [vol %]	High Pressure Phase Boron Nitride Mean Grain Diameter [μm]	Binder Composition Ratio [wt %]	Cutting Time Till Film Delamination [min]	Cutting Time Till Breakage [min]	Remarks	
65	cBN : 20	2.5	75 : TiN 25 : Al	-	1	breakage of substrate to expire life before film delamination	×
66	cBN : 45	2.5	75 : TiN 25 : Al	8	13	-	○
67	cBN : 55	2.5	75 : TiN 25 : Al	11	14	-	○
68	cBN : 45, wBN : 10	1.0	75 : TiN 25 : Al	10	13	-	○

Table 5 (continued)

Sample No.	Substrate cBN Sintered Compact			Cutting Estimation			Estimation
	High Pressure Phase Boron Nitride Content [vol %]	High Pressure Phase Boron Nitride Mean Grain Diameter [μm]	Binder Composition Ratio [wt %]	Cutting Time Till Film Delamination [min]	Cutting Time Till Breakage [min]	Remarks	
69	wBN : 55	0.2	75 : TiN 25 : Al	10	13	-	○
70	cBN : 55	2.5	60 : TiC 40 : TiAl ₃	11	13	-	○
71	cBN : 70	2.5	75 : TiN 25 : Al	11	15	-	○
72	cBN : 90	2.5	75 : TiN 25 : Al	-	5	breakage of substrate to expire life before film delamination	×
73	cBN : 55	5.0	75 : TiN 25 : Al	7	11	-	△
74	cBN : 60	2.5	45 : Co, 30 : Al 13 : WC, 12 : TiN	-	3	breakage of substrate to expire life before film delamination	×
75	cBN : 85	2.5	45 : Co, 30 : Al 13 : WC, 12 : TiN	8	14	-	○
76	cBN : 95	2.5	45 : Co, 30 : Al 13 : WC, 12 : TiN	-	3	breakage of substrate to expire life before film delamination	×
77	cBN : 85	5.0	45 : Co, 30 : Al 13 : WC, 12 : TiN	5	10	-	○
[Note] Estimation Results : ○, △, × (good, medium, bad)							

[0102] From these results, it will be understood that in the case of Sample Nos. 65 to 72, in which the binder of the cBN sintered compact substrate comprises at least one member selected from the group consisting of nitrides, borides, carbides of Group 4a, 5a and 6a elements of Periodic Table and solid solutions thereof and Al compounds, and unavoidable impurities, Sample Nos. 65 and 72, whose cBN contents are outside the scope of the present invention are inferior in strength of the cBN sintered compact substrate and tend to break at the initial period of cutting to expire the life. Further, it is found that in Sample No. 73, having a larger mean particle diameter, film delamination tends to occur.

[0103] From these results, it will moreover be understood that in the case of Sample Nos. 74 to 76, in which the binder of the cBN sintered compact substrate comprises at least one member selected from the group consisting of Co compounds, Al compounds and solid solutions thereof, and unavoidable impurities, Sample Nos. 74 and 76, whose

cBN contents are outside the scope of the present invention, are inferior in strength of the cBN sintered compact substrate and tends to break at the initial period of cutting to expire the life. In Sample No. 77, having a larger mean particle diameter, moreover, film delamination tends to occur.

(Example 6)

(1) Preparation of Sample

[0104] A sample of a cutting insert described below was prepared in an analogous manner to Example 4.

[0105] Using balls and a pot made of a cemented carbide, a binder powder consisting of 40 weight % of TiN and 15 weight % of Al, and 45 weight % of cBN powder with a particle diameter of 3 μm were mixed, charged in a cemented carbide vessel and sintered at a pressure of 5 GPa and a temperature of 1400 °C for 50 minutes to obtain a cBN sintered compact for wide use cutting of hardened steels. The resulting cBN sintered compact was worked in a cutting insert with a shape of SNGA 120412 according to ISO Standard.

[0106] This insert was coated with the surface-coated layer having the same structure as that of Sample No. 56 of Example 4 in an analogous manner to Example 1 by the use of the cathode 6a formed of (Ti 0.6, Al 0.4) and then subjected to measurement of the hardness.

(2) Analysis of Element Distribution

[0107] Then, a thin film piece was prepared by slicing the above described cutting insert in the vertical direction to the surface coated layer, and the resulting thin piece was used as a sample for a transmission electron microscope by ionic shinning method. The sample was observed by the transmission electron microscope and selecting several sites in the film thickness direction from the interface of the substrate side as to the surface coated layer, a composition of composed elements at each of the analysis sites was sought using an energy dispersion type X-ray micro-analysis device (EDX). For quantifying, calibration was carried out by a working curve obtained from a standard sample. The present analysis was carried out on two sites, that is, a part corresponding to an upper part of the cBN crystal particles of the substrate and another part corresponding to an upper part of the binder.

[0108] The results are shown in Table 6.

Table 6

Upper Part of cBN Crystal Particles						Upper Part of Binder					
Distance From Interface (nm)	N	O	Al	Ti	Cr	Distance From Interface (nm)	N	O	Al	Ti	Cr
24	10.6	2.8	22.2	61.7	2.8	24	8.1	2.4	10.7	77.4	1.2
96	9.6	2.7	25.8	41.2	0.8	112	9.2	2.7	26.4	60.9	0.7
176	9.8	2.3	27.9	59.8	0.3	196	9.5	2.6	27.3	60	0.6
256	10.4	2.2	27.6	59.7	0.2	272	9.4	2.7	25.9	61.5	0.5
504	11.6	2.4	27.2	58.8	0.1	516	9.7	2.3	24	62	0.2
						864	9.5	1.9	26.4	62.4	0


[0109] Fig. 4 shows the results of Example 6 in which Cr element distribution is plotted for the distances (nm) from the interface. It is apparent from Fig. 4 that the Cr element distribution is decreased toward the growth direction of the surface coated layer from the interface part, thus forming a gradient composition material, in any case of the upper part of the cBN crystal particles and the upper part of the binder.

[0110] The surface-coated cubic boron nitride sintered compact tool of the present invention can favorably be compared with the prior art one with respect to improvement of the adhesive strength of the hard coated layer to the cBN sintered compact substrate, improvement of the wear resistance and breakage resistance of the tool through suppressing contact of cBN particles and hard-to-cut ferrous materials and other excellent effects of improving a worked surface, whereby the service life of the tool is markedly improved.


Claims

1. A surface-coated boron nitride sintered compact tool, in which at least a part of the tool edge related with cutting is based on a substrate of a high pressure phase type boron nitride, and a surface-coated layer is allowed to be present on the surface thereof, the said surface-coated layer comprising an intermediate layer present in discontinuous manner to the interface of the said high pressure phase boron nitride sintered compact substrate and a hard coated layer formed further thereon, the said intermediate layer consisting of at least one element selected from the Group 4a, 5a and 6a of Periodic Table and having a thickness of at most 1 μm .
2. A surface-coated boron nitride sintered compact tool, in which at least a part of the tool edge related with cutting is based on a substrate of a high pressure phase type boron nitride, and a surface-coated layer is allowed to be present on the surface thereof, the said surface-coated layer comprising an intermediate layer present in discontinuous manner to the interface of the said high pressure phase boron nitride sintered compact substrate and a hard coated layer formed further thereon, the said intermediate layer being present as dispersed particles consisting of at least one element selected from the Group 4a, 5a and 6a of Periodic Table, the proportion of particles of at least 0.1 μm to less than 0.5 μm being at least 1 % to at most 20 % by volume based on the surface-coated layer, and the proportion of particles of at least 0.5 μm by volume being at most 5 % by volume, based on the surface-coated layer.
3. The surface-coated boron nitride sintered compact tool as claimed in Claim 1 or Claim 2, wherein the intermediate layer contains at least one of elements of Cr, Zr and V.
4. The surface-coated boron nitride sintered compact tool as claimed in Claim 1 or 2, wherein the hard coated layer contains at least one layer containing at least one element selected from the group consisting of Group 4a, 5a, 6a elements, Al, E, Si and Y and at least one element selected from the Group consisting of C, N and O and having a hardness of a Knoop Hardness H_k = at least 2,000 and a film thickness of at least 0.5 μm to at most 10 μm .
5. The surface-coated boron nitride sintered compact tool as claimed in any one of Claims 1 to 4, wherein the surface-coated layer is formed by an ion plating method, sputtering method or vacuum arc vapor deposition method.
6. The surface-coated boron nitride sintered compact tool as claimed in any one of Claims 1 to 5, wherein the outermost surface layer of the surface-coated layer consists of a compound consisting of at least one element selected from the group consisting of Ti and Cr and at least one element selected from the group consisting of C, N and O.
7. The surface-coated boron nitride sintered compact tool as claimed in any one of Claims 1 to 6, wherein the outermost surface layer of the surface-coated layer is a CrN layer.
8. The surface-coated boron nitride sintered compact tool as claimed in any one of Claims 1 to 7, wherein at least a site related with cutting is provided with a surface-coated layer having a central line mean roughness R_a , defined by JIS B0601 (measured length 0.8 mm), of at most 0.2 μm .
9. The surface-coated boron nitride sintered compact tool as claimed in any one of Claims 1 to 8, wherein at least a part of the tool edge related with cutting is based on a cubic boron nitride sintered compact comprising at least 30 volume % to at most 80 volume % of cubic boron nitride and the balance of at least one binder selected from the group consisting of nitrides, borides, carbides of Group 4a, 5a and 6a elements of Periodic Table, and Al compounds and solid solutions thereof and unavoidable impurities.
10. The surface-coated boron nitride sintered compact tool as claimed in any one of Claims 1 to 8, wherein at least a part of the tool edge related with cutting is based on a cubic boron nitride sintered compact comprising at least 80 volume % to at most 90 volume % of cubic boron nitride and the balance of at least one binder selected from the group consisting of Co compounds and Al compounds, and solid solutions thereof and unavoidable impurities.
11. The surface-coated boron nitride sintered compact tool as claimed in any one of Claims 1 to 10, wherein the cubic boron nitride has a mean particle diameter of at most 4 μm .

DISCONTINUOUS

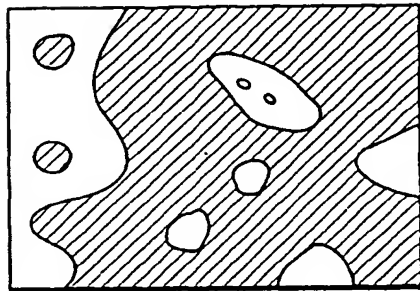


(A)

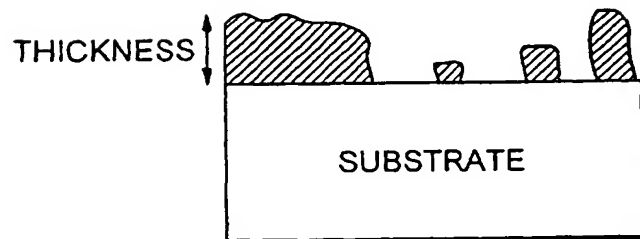


(B)

FIG. 1

GRANULAR DISCONTINUITY

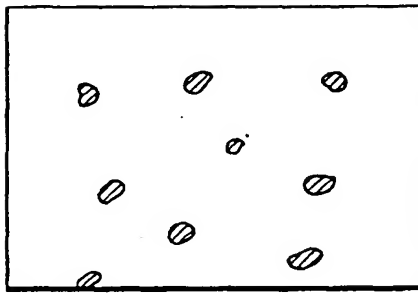

(A)

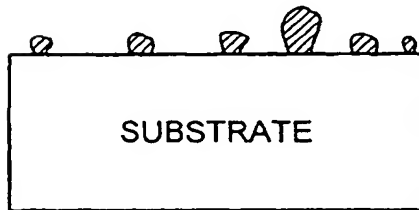

(B)

FIG. 2

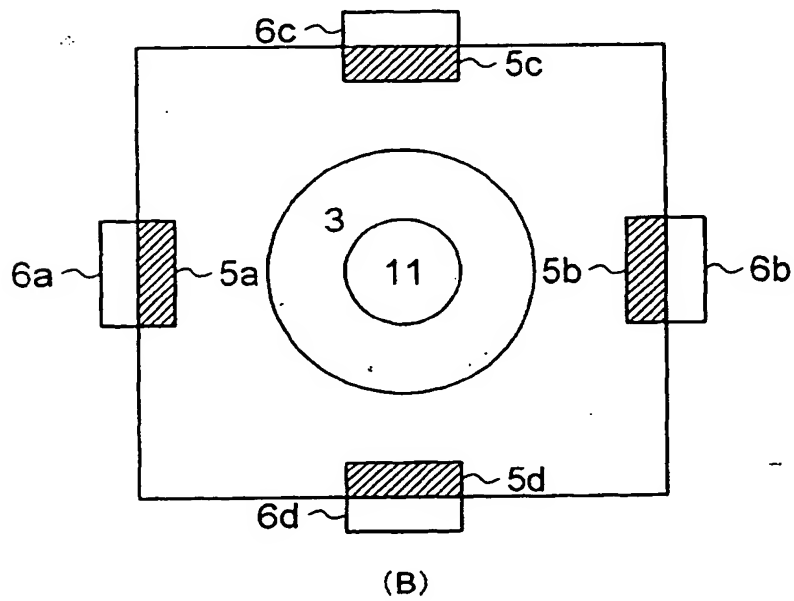
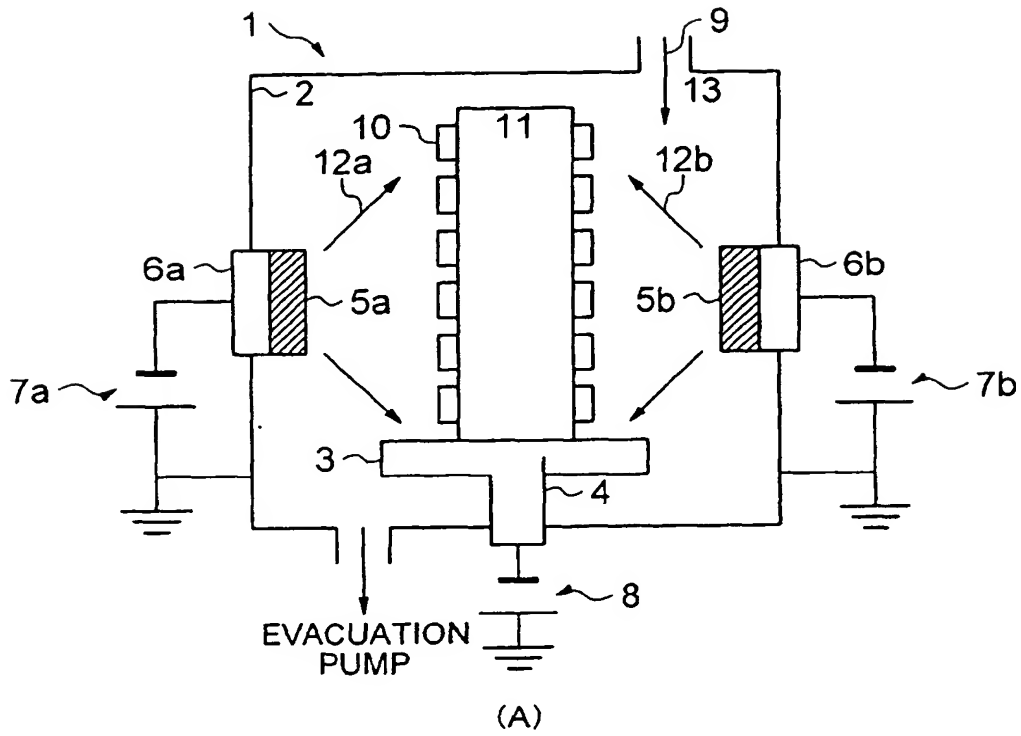


FIG. 3

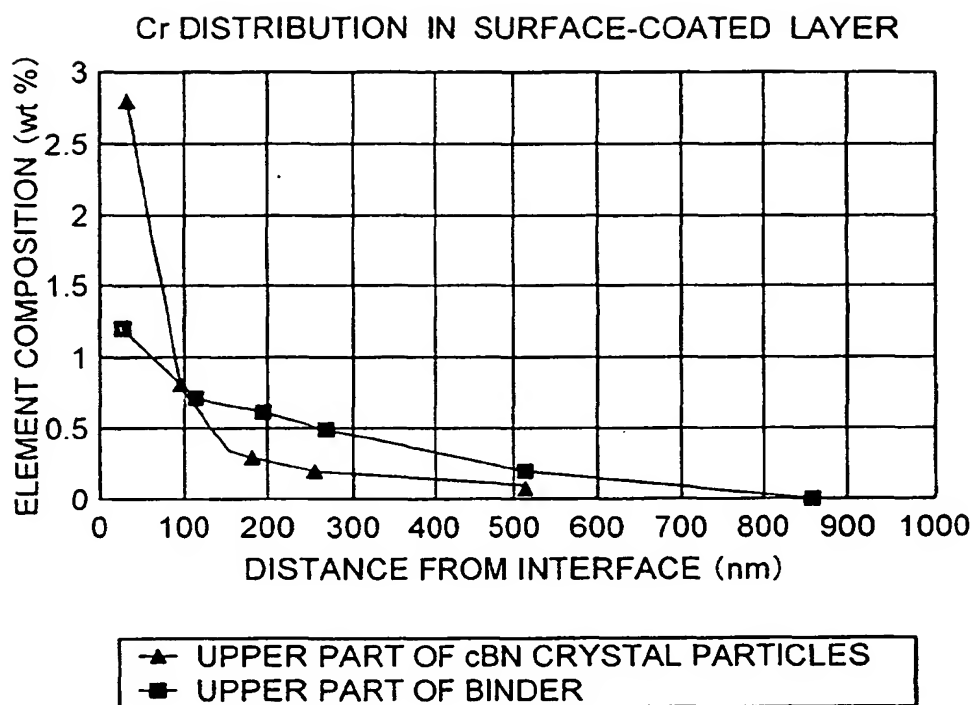


FIG. 4

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 186 580 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
31.07.2002 Bulletin 2002/31

(51) Int Cl.7: **C04B 41/89**, B23B 27/14,
C23C 14/02

(43) Date of publication A2:
13.03.2002 Bulletin 2002/11

(21) Application number: **01307358.0**

(22) Date of filing: **30.08.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **31.08.2000 JP 2000262399**
17.08.2001 JP 2001247814

(71) Applicant: **Sumitomo Electric Industries, Ltd.**
Osaka (JP)

(72) Inventors:
• **Kukino, Satoru, Itami Works**
Itami-shi, Hyogo (JP)

- **Ota, Michiko, Itami Works**
Itami-shi, Hyogo (JP)
- **Ohara, Hisanori, Itami Works**
Itami-shi, Hyogo (JP)
- **Fukui, Haruyo, Itami Works**
Itami-shi, Hyogo (JP)


(74) Representative:
Cross, Rupert Edward Blount et al
BOULT WADE TENNANT,
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)

(54) **A cutting tool of a surface-coated boron nitride sintered compact**


(57) The object of the present invention is to provide a cutting tool consisting of a surface-coated high pressure phase type boron nitride sintered compact, having a markedly improved adhesive strength of a hard coated layer to a cBN sintered compact substrate.

The feature consists in a surface-coated boron nitride sintered compact tool, in which at least a part of the tool edge related with cutting is based on a substrate of a high pressure phase type boron nitride, and a surface-coated layer is allowed to be present on the surface thereof, the said surface-coated layer comprising an intermediate layer being present in discontinuous manner to the interface of the said high pressure phase boron nitride sintered compact substrate and a hard coated layer formed further thereon or in the form of dispersed particles, the said intermediate layer consisting of at least one element selected from the Group 4a, 5a and 6a of Periodic Table.

DISCONTINUOUS



(A)

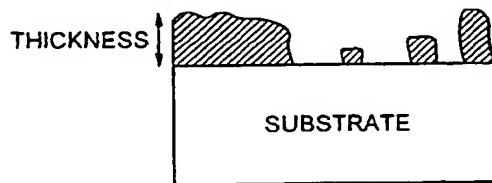

(B)

FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 7358

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D, X	PATENT ABSTRACTS OF JAPAN vol. 013, no. 308 (C-617), 14 July 1989 (1989-07-14) & JP 01 096084 A (MITSUBISHI METAL CORP), 14 April 1989 (1989-04-14) * abstract *	1, 4, 6, 9, 10	C04B41/89 B23B27/14 C23C14/02
P, X A	US 2001/003569 A1 (SHIRAISHI JUNICHI ET AL) 14 June 2001 (2001-06-14) * claims 1, 2, 7 * * example 5.8; table 5 * * example 1 * * paragraph '0025' *	1, 4, 5, 7-9, 11 6, 10	
L	EP 1 195 452 A (SUMITOMO ELECTRIC INDUSTRIES) 10 April 2002 (2002-04-10) this document is cited for assessing clarity and sufficiency of disclosure * claim 1 * * example 1, sample no. 1 *		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7) C04B C23C B23B
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 5 June 2002	Examiner Rosenberger, J
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date O : document cited in the application L : document cited for other reasons § : member of the same patent family, corresponding document	

EPO FORM 1503 03/92 (P04G01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 7358

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-06-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 01096084	A	14-04-1989	JP 7025619 B	22-03-1995
US 2001003569	A1	14-06-2001	EP 1122226 A2	08-08-2001
			JP 2001220268 A	14-08-2001
EP 1195452	A	10-04-2002	CN 1347784 A	08-05-2002
			EP 1195452 A1	10-04-2002
			US 2002045072 A1	18-04-2002

EP 01 30 7358

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82